

INDOOR FIBER CABLE OM2

109-112XX

Phone
+33 75 864 2169

Email
info@angnetworks.com

Log 202, 5rue Albert Thomas, 38100
Grenoble, France.



Overview

- Category: OM2
- Tight buffer design and LSZH outer jacket, ensuring flexibility, durability, and compliance with industry standards for fire performance

Industry Standard

- ISO/IEC11801
 - ANSI/TIA 568-2.D
 - CENELEC EN 50173
- IEC60794-1
 - IEC60332-3C

Applications


- Inter-building connectivity
- Backbone premise pathways
- Drop ceiling installations
- Suitable for 10Gbps Ethernet, 550Mgh Broadband Video, SAN, data center, and indoor general-purpose cable distribution.

Ordering Information

Part Number	Description
109-11206	6C INDOOR FIBER CABLE 50/125 MM OM2 - LSZH
109-11208	8C INDOOR FIBER CABLE 50/125 MM OM2 - LSZH
109-11212	12C INDOOR FIBER CABLE 50/125 MM OM2 - LSZH
109-112XX	16C AND ABOVE AVAILABLE ON REQUEST

General Information

- Fiber Count: 2 to 12
- Tight-buffered Fiber Dimension: 850µm±50µm,
- Tight-buffered Fiber Material: LSZH
- Tight-buffered Fiber Color:
 1. Blue
 2. Orange
 3. Green
 4. Brown
 5. Grey
 6. White
 7. Red
 8. Black
 9. Yellow
 10. Purple
 11. Pink
 12. Aqua
- Strength Member: Aramid Yarn
- Outer Jacket Dimension: 8.5mm±0.3mm,
- Outer Jacket Material: LSZH
- Outer Jacket Color: Orange
- Jacket Properties: Anti-corrosion, Anti-water, Anti-ultraviolet Radiation, Flame retardant,Environmentally harmless, etc.

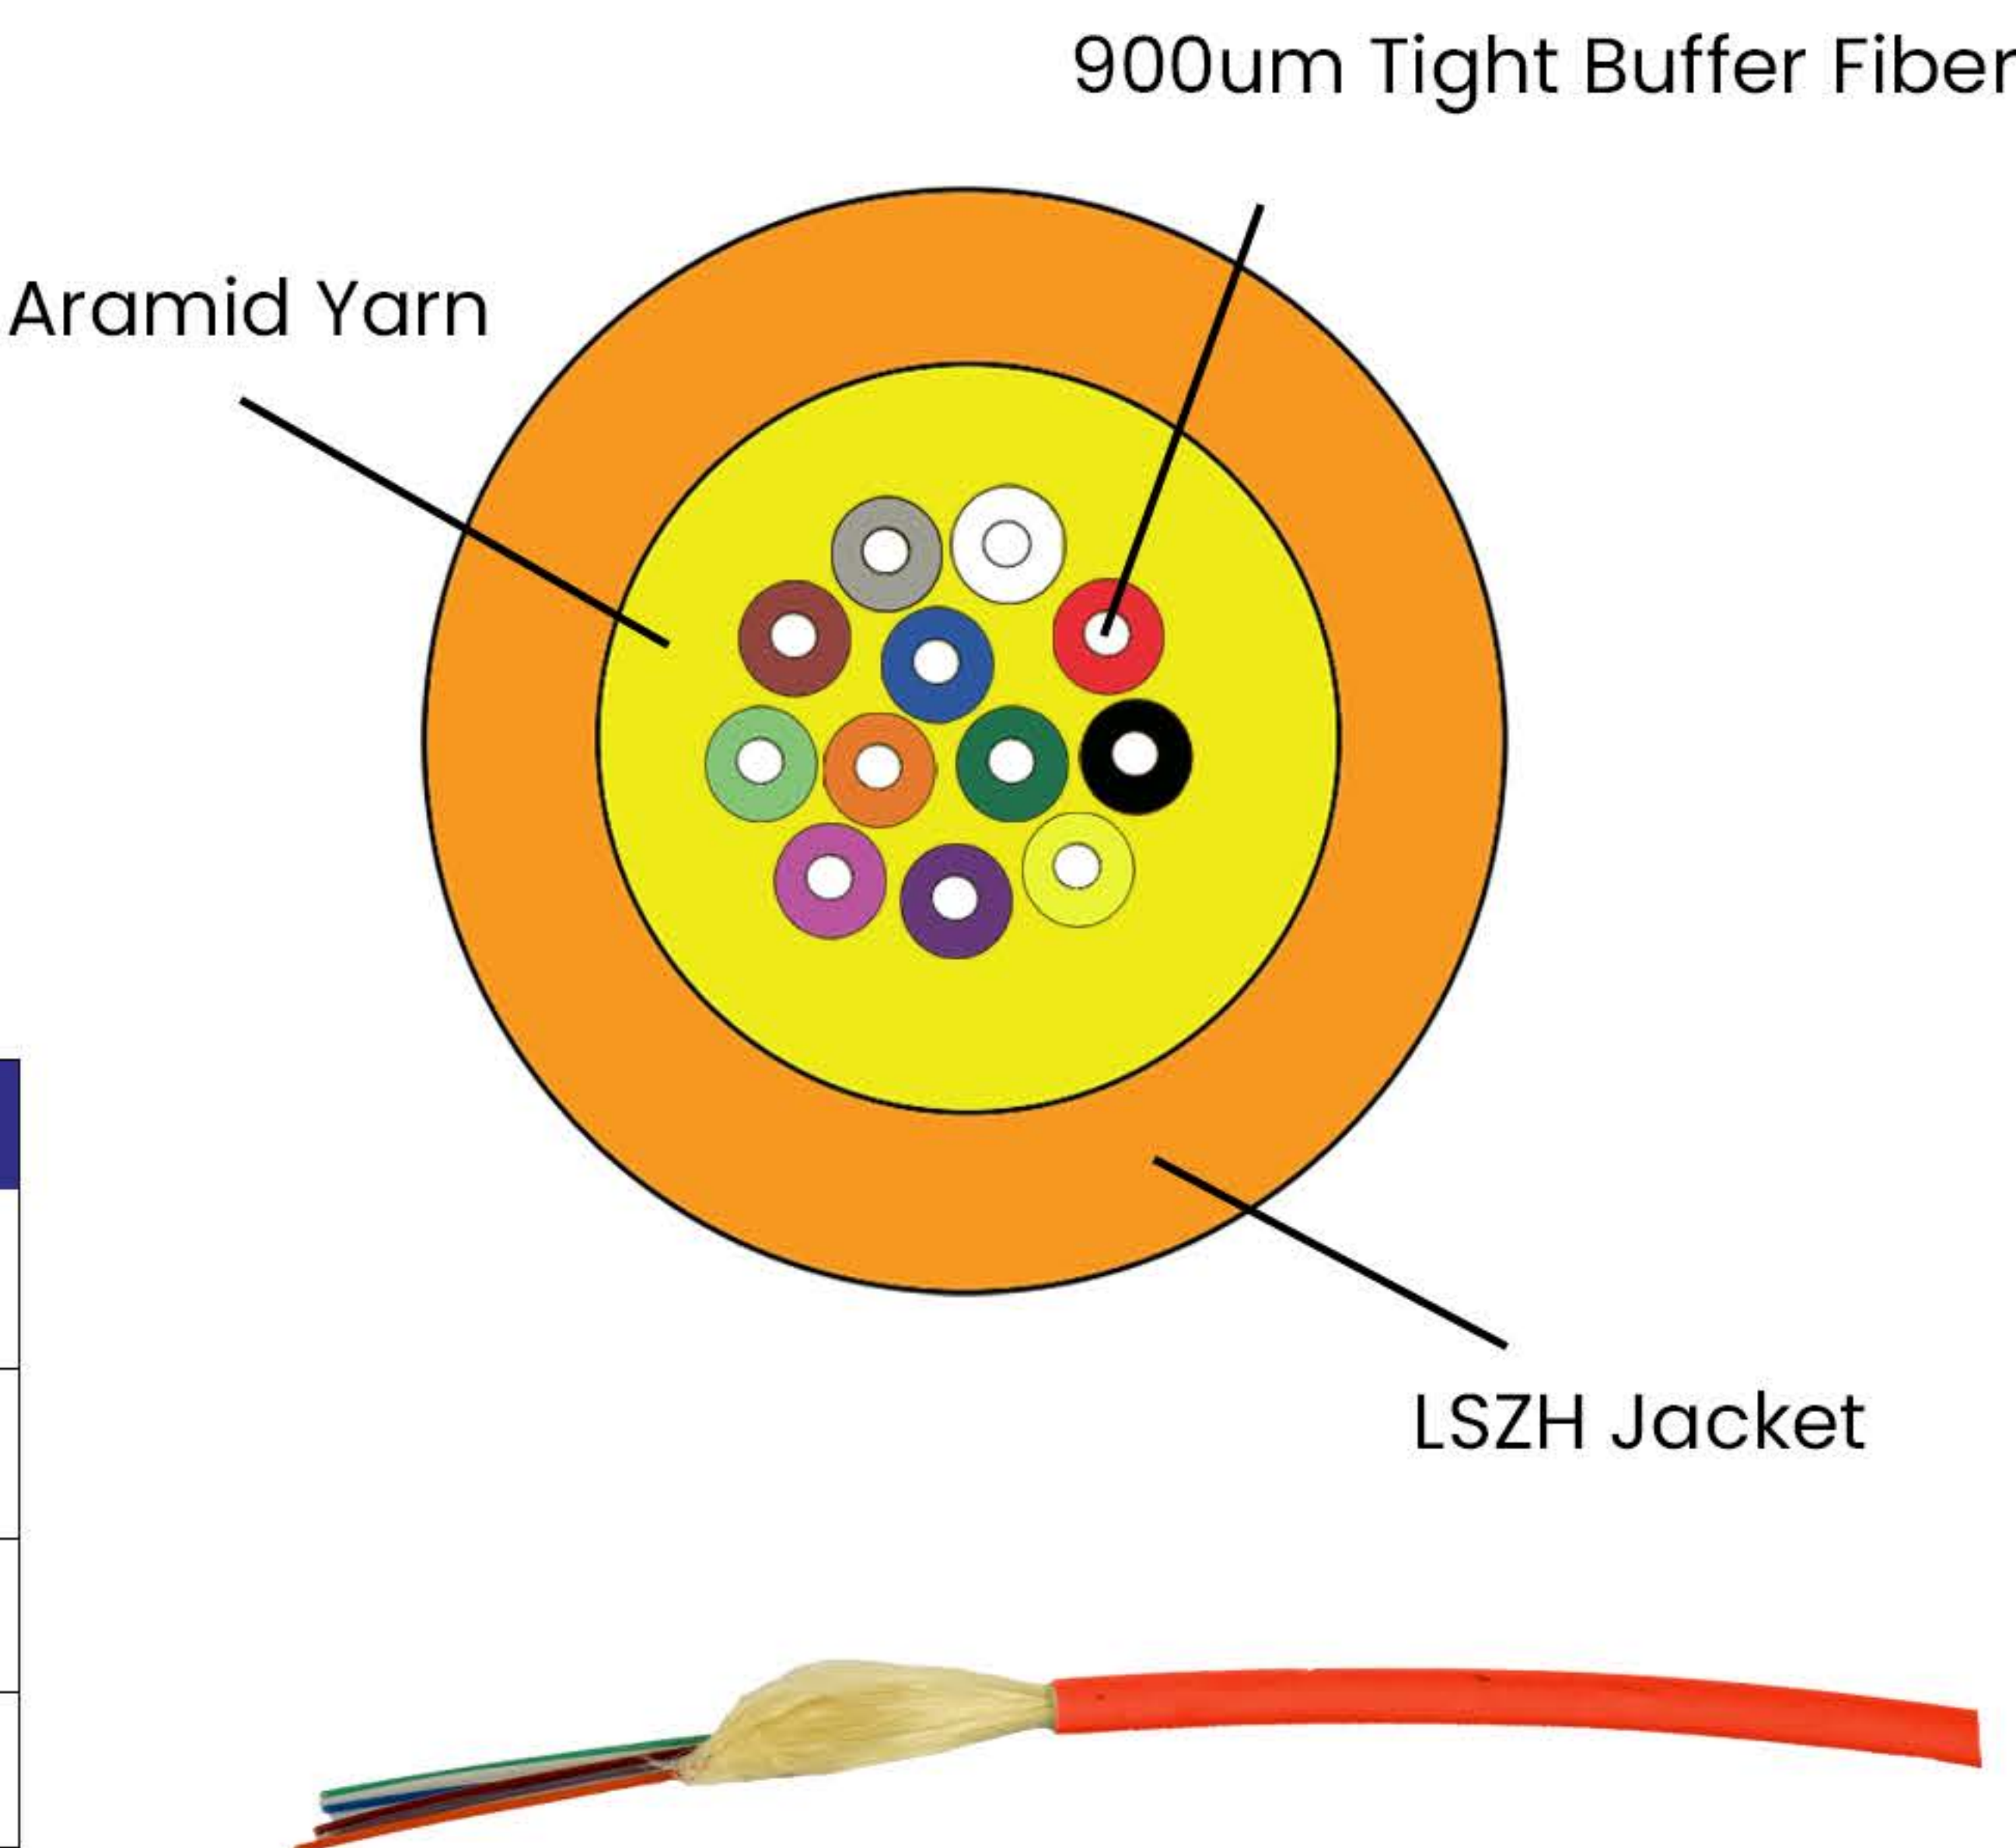

Geometric Parameters

- Core Diameter: 50.0±2.5µm
- Cladding Diameter: 124.8±1.0µm
- Cladding Non-Circularity: ≤1.0
- Core-Cladding Concentricity Error: ≤1.0
- Coating Diameter: 245±5µm
- Coating Non-Circularity: ≤6.0
- Cladding-Coating Concentricity Error: ≤12.0

Optical Performance Parameters

- Bandwidth (min) 850nm: 200 MHz
- Bandwidth (min) 1300nm: 500 MHz
- Attenuation (max.) 850nm: ≤3.0 dB/km
- Attenuation (max.) 1300nm: ≤1.0 dB/km

Mechanical and Environmental Characteristics

Fiber	Buffer	Kg/km	Tension (N) (Long/Short)	Diameter(mm)
2	2	15	200/400	4.00
4	4	18	200/400	4.90
6	6	23	300/600	5.20
8	8	27	300/600	5.50
12	12	36	300/600	6.20
16	16	55	300/600	7.30
24	24	65	300/600	8.50
32	32	70	300/600	9.50
36	36	74	300/600	9.50
48	48	110	400/800	10.50

Items	Unit	Specification
Tension (Long Term)	N	500
Tension (Short Term)	N	1000
Crush (Long Term)	N/10cm	300
Crush (Short Term)	N/10cm	1000
Min. Bend Radius (Dynamic)	mm	20D
Min. Bend Radius (Static)	mm	10D
Installation Temperature	°C	-10~+50
Operating Temperature	°C	-20~+60
Storage Temperature	°C	-20~+60