

CAT 6A S/FTP CABLE PVC SHEATH

108-92001

Phone
+33 75 864 2169

Email
info@angnetworks.com

Log 202, 5rue Albert Thomas, 38100
Grenoble, France.



Overview

- Category: S/FTP-CAT6A-4P- PVC
- Construction Type: S/FTP (Shielded and Foiled Twisted Pair)
- High-performance networking applications requiring high data rates and reliability.

Industry Standard

- ANSI/TIA 568.2-D
 - ISO/IEC 11801
 - EN 13501-6
 - EN 50399, EN 60754-1/2
- IEC 61156-5, EN 50399
 - EN 50288-10-1
 - IEEE 802.3bt level 3 & 4
 - EN 60332-1-2, EN61034-2

Applications



- Horizontal Cabling Above Suspended Ceilings
- Horizontal Cabling Below Raised Flooring
- Ethernet Network Cabling – EIA568

Ordering Information

Part Number	Description
108-92001	CAT 6A S/FTP CABLE PVC SHEATH

General Information

- Conductor Wire: 23 AWG
- Conductor Material: Solid Bare Copper
- Nominal Outer Diameter (O.D.): 0.560 mm
(up +0.005, down -0.005)
- Insulation Diameter: 1.330 ± 0.05mm
- Inner Screening Material: AL/Mylar
- Drain Wire: Yes
- Outer Screening Material: Aluminum-magnesium alloy
- Screening Coverage: ≥40%
- Sheath Thickness: 0.55 ± 0.05 mm
- External O.D.: 7.5 ± 0.5 mm
- Sheath Material: PVC complies with RoHS
- Surface Clean Material: LSZH(complies RoHS)
- Surface Printing: Letter height 3.0 ± 0.3mm, Color: Black,
- Print error & Space: ≤±0.5%, 1m
- Core Color:
- White/Blue
 1. White/Orange
 2. White/Green
 3. White/Brown
 4. Rip-cord: Yes

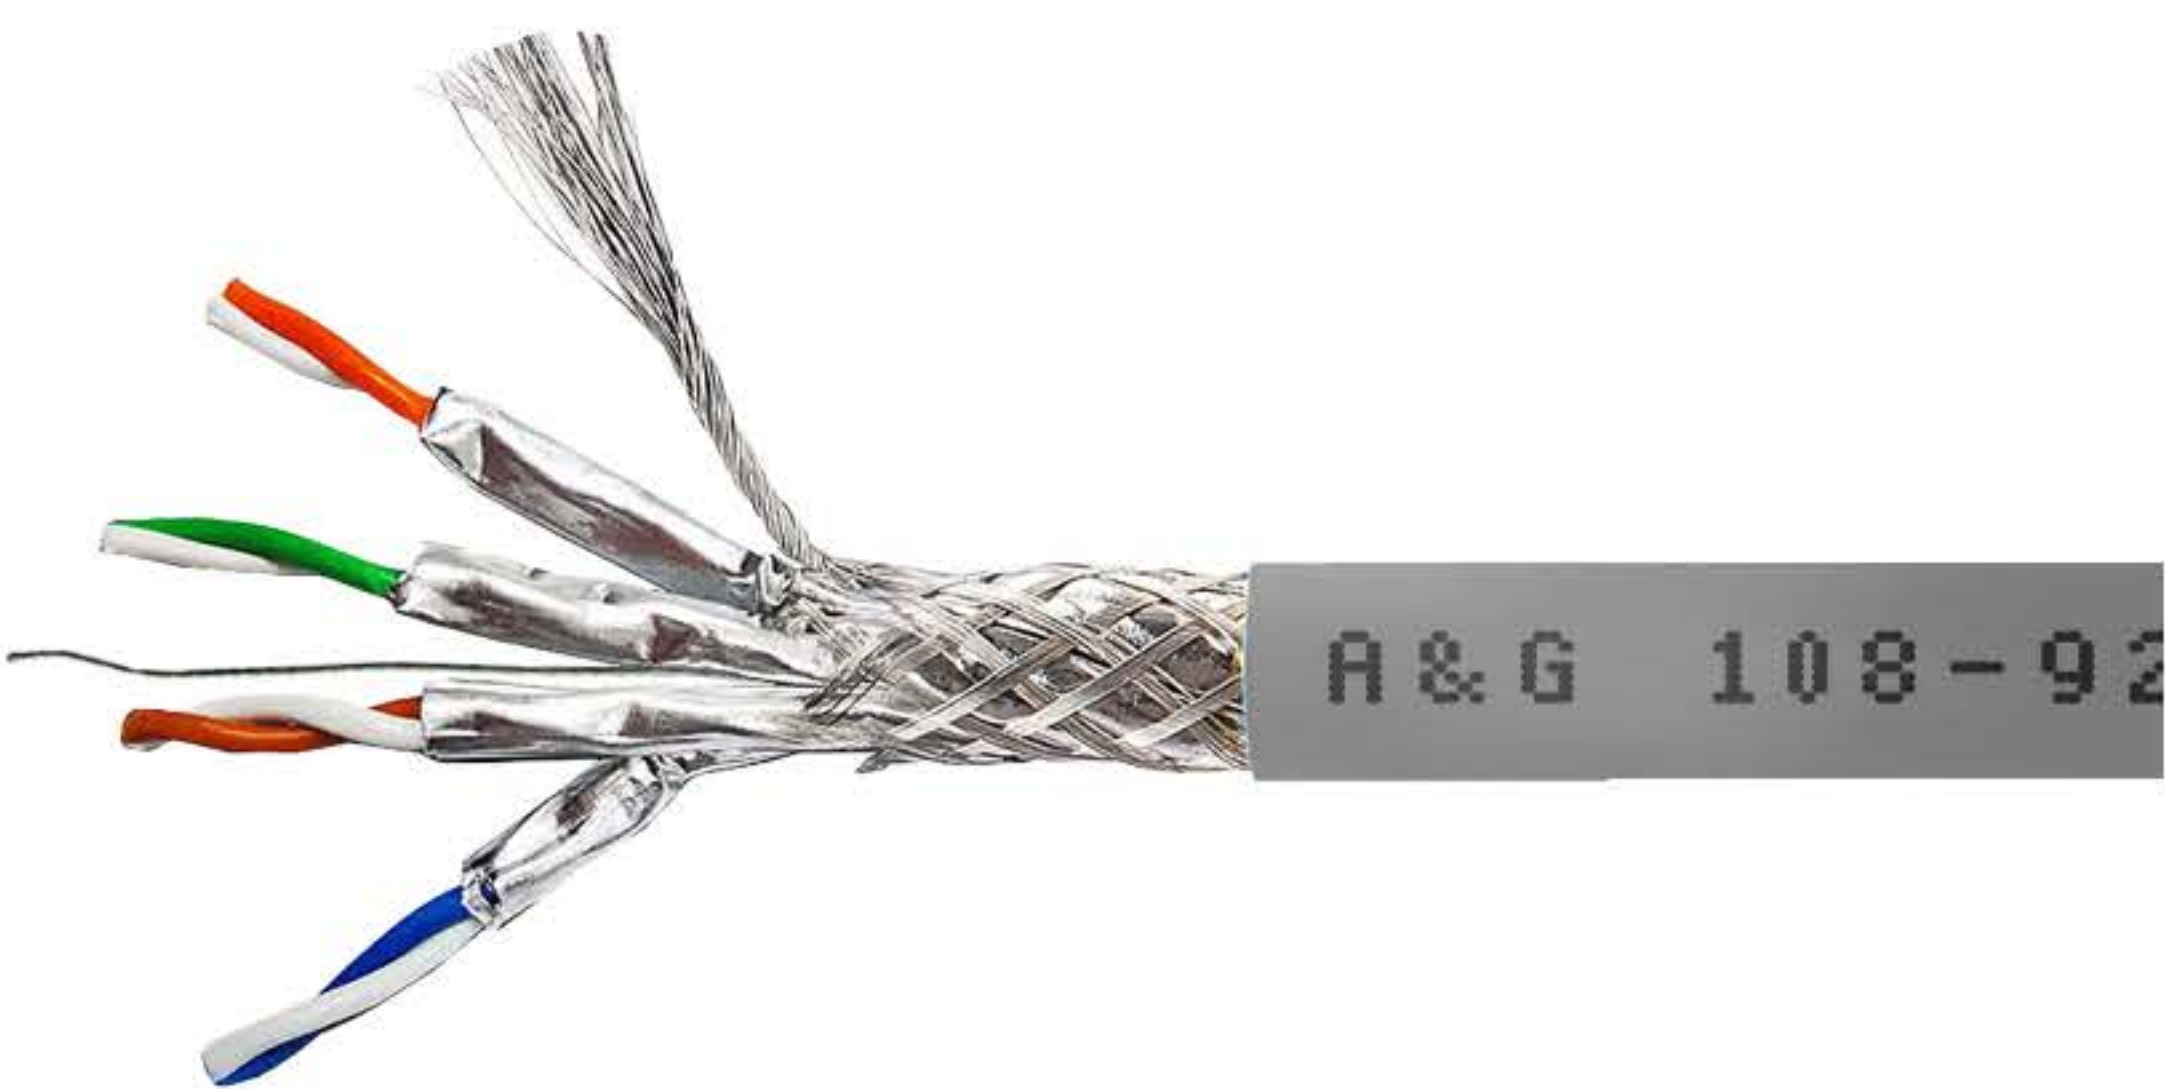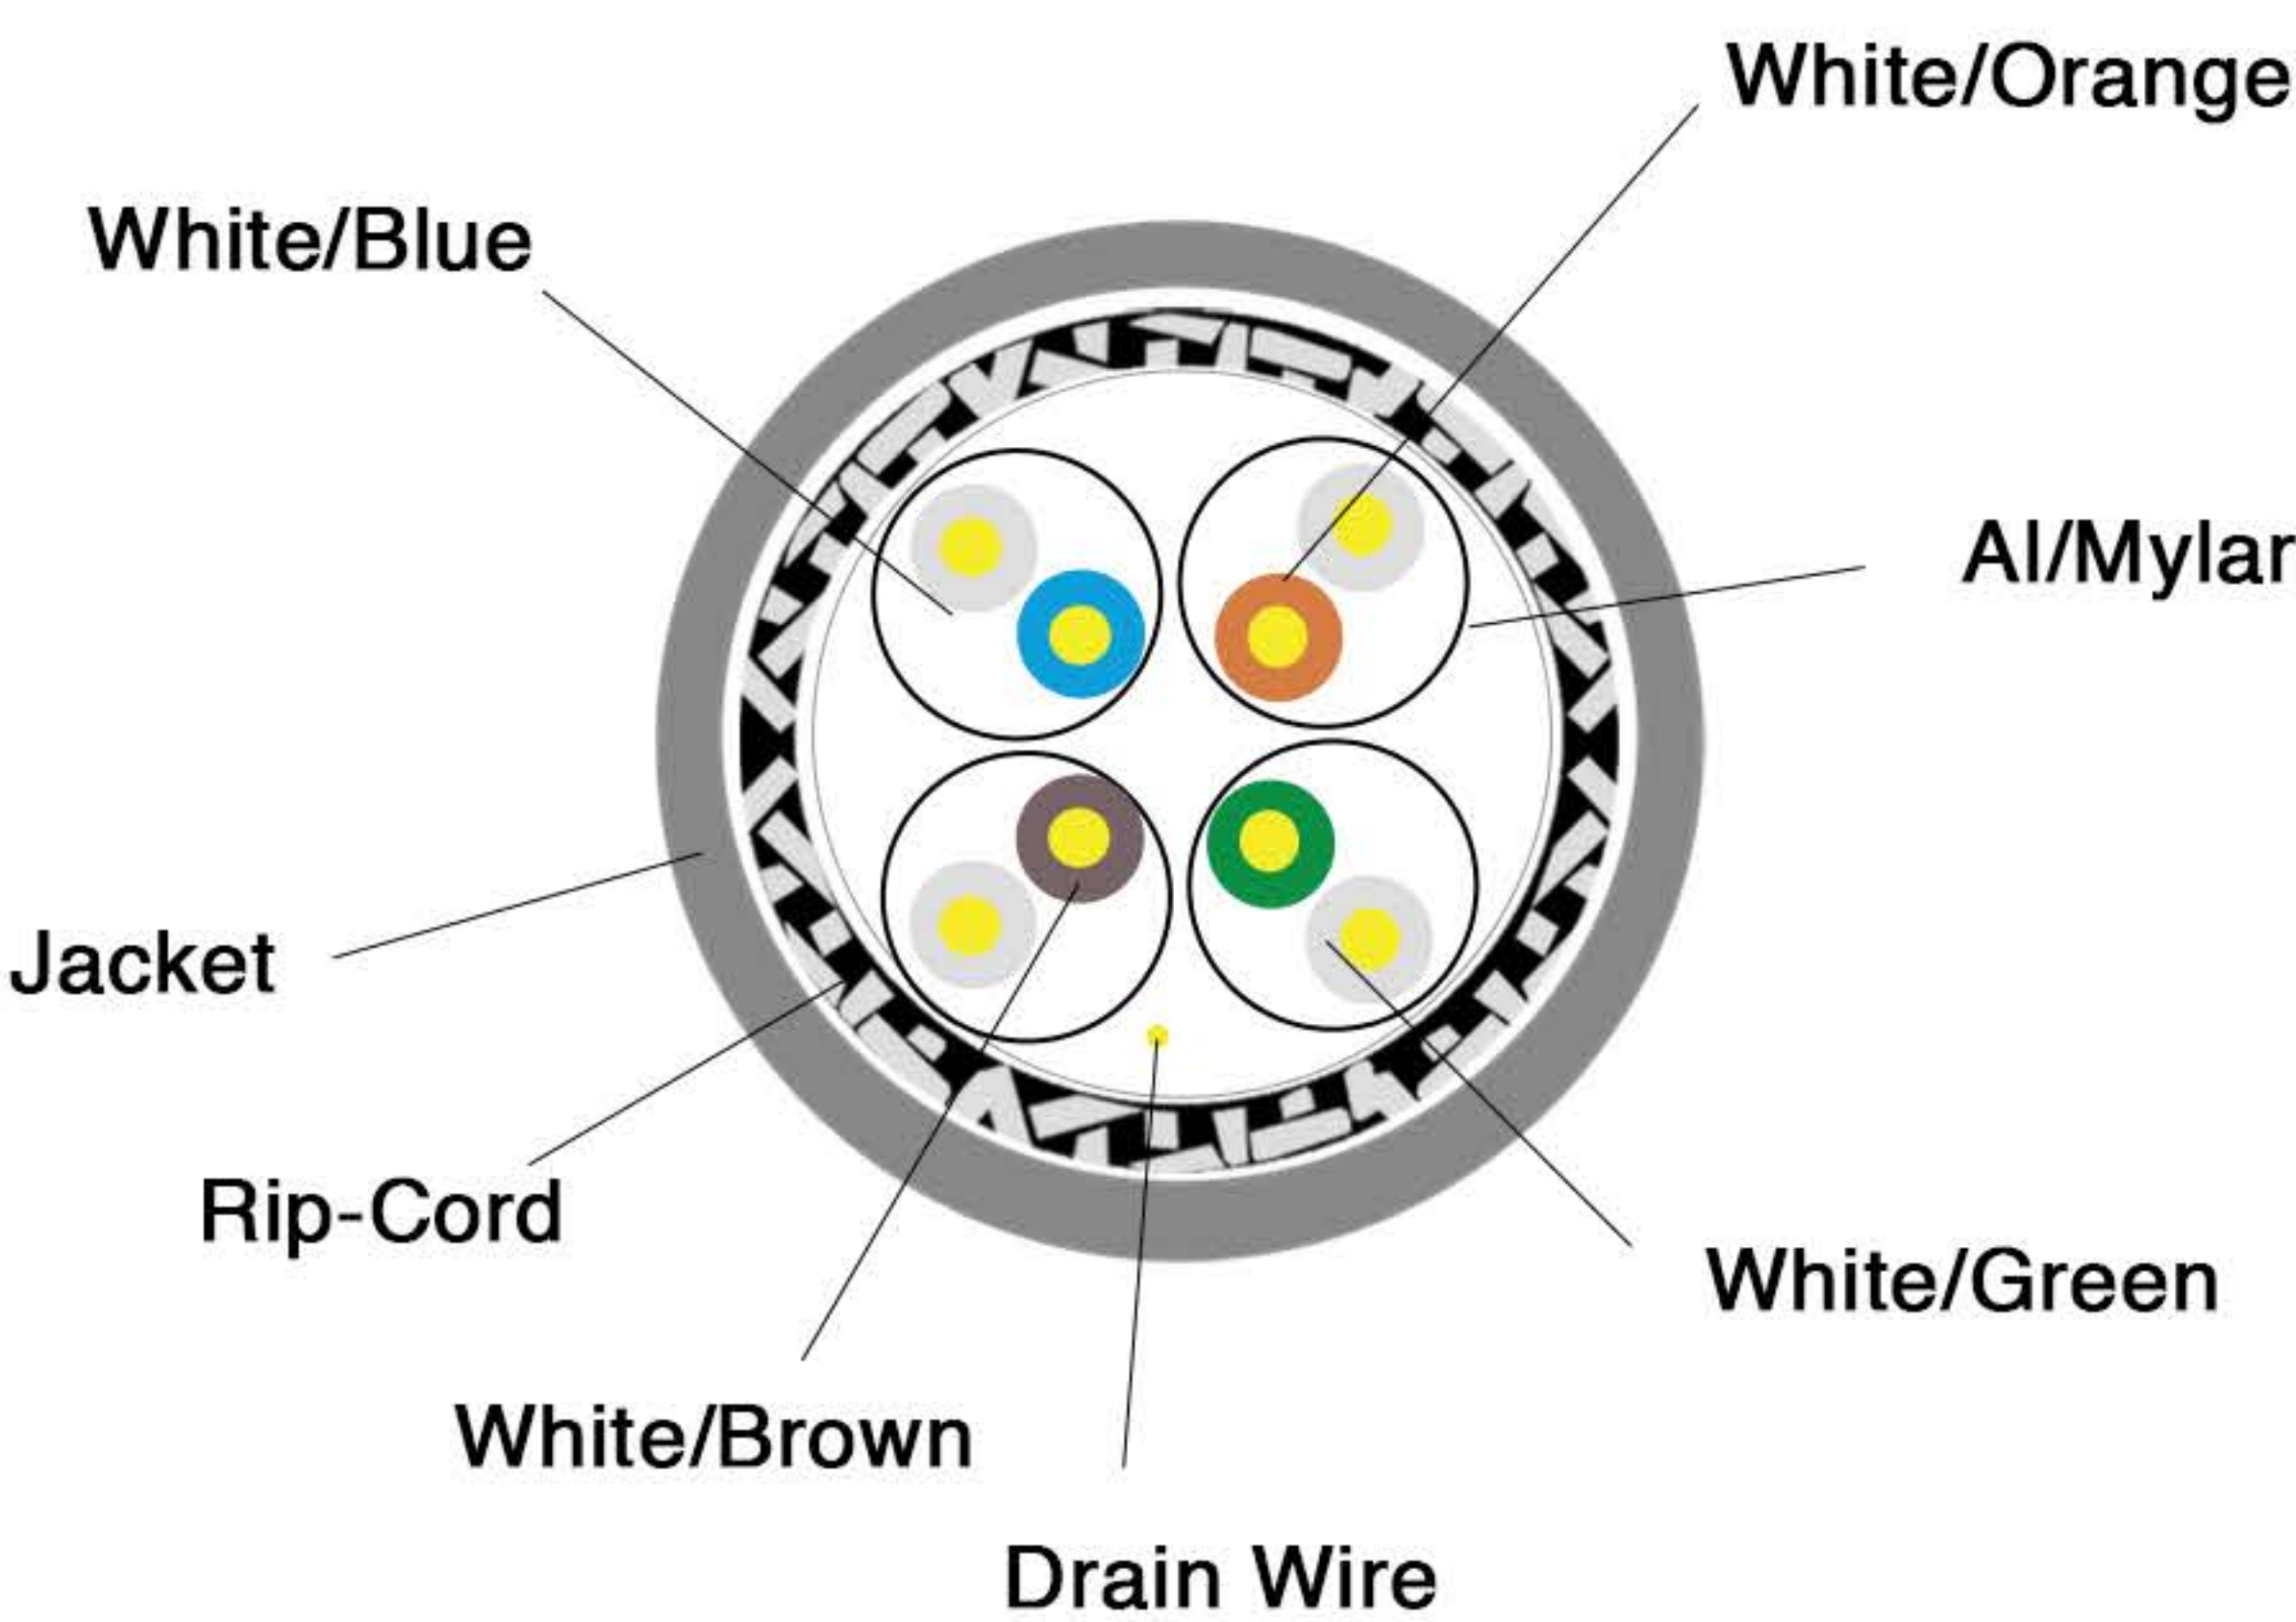

PRODUCT TECHNICAL SPECIFICATION | CAT 6A S/FTP CABLE PVC SHEATH

Product Electrical Characteristics:

Sheath Physical Properties:

- Impedance: 100±15Ω (1-250MHz)
100±22Ω (250-500MHz)
- Delay Skew: ≤45 ns/100m (1.0-500MHz)
- Unbalanced to Ground Capacitance: ≤330 pf/100m
- DC Resistance: ≤9.38Ω/100m
- DC Conductor Resistance Unbalance: ≤5.0%

- Tensile Strength (Before Aging): ≥10.0 MPa
- Elongation (Before Aging): ≥125%
- Aging Period: 100°Cx24h×7d
- Tensile Strength (After Aging): ≥8.0 MPa
- Elongation (After Aging): ≥100%
- Cold Bend Test: (-20±2°Cx4h) 8xCable O.D.
Without visible cracks

Technical Performance

Frequency (MHz)	RL (≥dB)	Attenuation (≤dB)	NEXT (≥dB)	Delay (≤ns)
1.0	20.0	2.1	74.3	570.0
4.0	23.0	3.8	65.3	552.0
8.0	24.5	5.3	60.8	546.7
10.0	25.0	5.9	59.3	545.4
16.0	25.0	7.5	56.2	543.0
20.0	25.0	8.4	54.8	542.1
25.0	24.3	9.4	53.3	541.2
31.25	23.6	10.5	51.9	540.4
62.5	21.5	15.0	47.7	538.6
100	20.1	19.1	44.3	537.6
200	18.0	27.6	39.8	536.5
250	17.3	31.1	38.3	536.3
300	16.8	34.3	37.1	536.1
500	15.2	45.3	33.8	535.6

Frequency (MHz)	PSNEXT (db) ≥	ELFEXT (dB) ≥	PSELFEXT (dB) ≥
1.0	72.3	67.8	64.8
4.0	63.3	55.8	52.8
8.0	58.8	49.7	46.7
10.0	57.3	47.8	44.8
16.0	54.4	43.7	40.7
20.0	52.8	37.8	38.8
25.0	41.3	39.8	36.8
31.25	49.9	37.9	34.9
62.5	45.4	31.9	28.9
100	42.3	27.8	24.8
200	37.8	21.8	18.8
250	36.3	19.8	16.8
300	35.1	18.3	15.3
500	31.8	13.8	10.8